

Clips and probes

Caution: Two clips are needed in order to carry out measurements. Some clips are offered individually, some in a set of two pieces.

OM 16


AMT005 Long handspike, per unit
Needle Ø: 3 mm, length without handle: 83 mm, total length: 215 mm, cable length: 5 m



AMT006 Large Kelvin clip, per unit
Opening Ø: 25 mm, cable length: 5 m




AMT011 Small handspike, per unit
Needle Ø: 3 mm, total length: 125 mm, cable length: 5 m



AMT012 Small Kelvin clip, per unit
Opening Ø: 12 mm, cable length: 5 m



AMT013 Triggered handspike (Through RS232 connection), per unit
Opening Ø: 3 mm, length without handle: 83 mm, total length: 215 mm, cable length: 5 m



AMT008 Extension lead – Length: 20 m

AMT014 External Pt100 temperature sensor
AMT015 Extension cable for AMT014 – Length: 2 m

OM 21 / 22 / 10


AN5806-2 Gold plated Kelvin clip, set of two
Opening Ø: 12 mm, cable length: 2 m



AN5806C Kelvin clip, set of two
Opening Ø: 12 mm, cable length: 3 m



AMT003 Handspike, per unit
Cable length: 5 m



AMT004 Kelvin clip, per unit
Opening Ø: 25 mm, cable length: 3 m





Software

OM 16 / 21 / 22

LOG OM

Configuration and data management software
Includes a RS232 cable

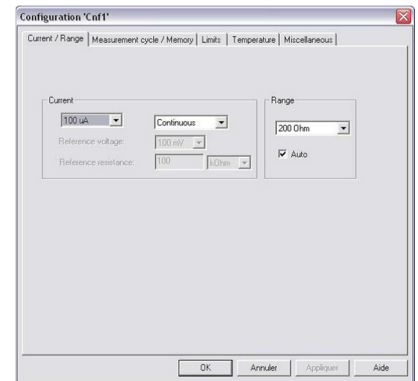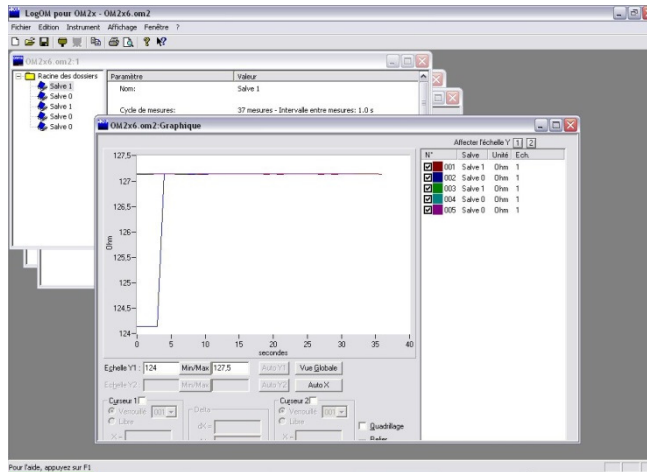

Further accessories

OM 16

PX 58

Printer with batteries – Paper width: 58 mm

CX 85

Printer with mains supply – Paper width: 85 mm



OM 21 / 22

OM2-LABV-DRIV LABVIEW driver for OM 21 / 22 – Available on www.aoip.com

AN6901

Soft transport case

AMT002

External power supply 3 V – 10 A

AN5883

Bracket for panel mounting (T2 box type)

AN5884

Rack kit for rack mounting (T2 box type)

AN5875

RS232 9/9 pts male/female cable

AN5836

IEEE 488 cable – Length: 2 m

AN8009

Set of 10 fuses – 16 A

Certification

QMA11EN

COFRAC calibration certificate