

# Piezoelectric Pressure Sensor

Type 603C...

## For Test & Measurement Applications

The miniature pressure sensors of the 603C series are, due to their high natural frequency, suited for a variety of applications where highly dynamic pressure transients need to be measured. The acceleration compensation ensures reliable measurements even under highly vibrating conditions.

- Pressure range up to 1 000 bar (15 000 psi)
- Acceleration compensated
- Small sensor size
- Short rise time & high natural frequency
- Wide operating temperature range
- Charge (PE) or Voltage (IEPE) output

### Description


Due to their high natural frequencies, piezoelectric pressure sensors can be used for a variety of applications where dynamic pressures need to be measured. Another unique characteristic of piezoelectric pressure sensors is their ability to measure small pressure fluctuations that are superimposed on top of high static pressures with exceptional resolution. By contrast, piezoresistive pressure sensors are the right choice when measuring static pressure curves.

At the core of the all-welded, hermetically sealed 603C series there is a Quartz crystal. The pressure to be measured acts on the sensor's diaphragm and compresses the Quartz crystal. The compressed crystal produces a charge which is proportional to the pressure. Finally the charge signal needs to be converted, by a charge amplifier, into a voltage which can then be read.

Two variants of the sensor are available, charge output (PE) and voltage output (IEPE resp. Piezotron®). The instruction manual gives an overview on the characteristics of both variants, an indication of which type of application they are best suited to and the full measuring chain.

### Typical Applications

- High pressure measurements on hydraulic and pneumatics systems, etc.
- Highly dynamic pressure measurements on shock tubes, blast tests, etc.

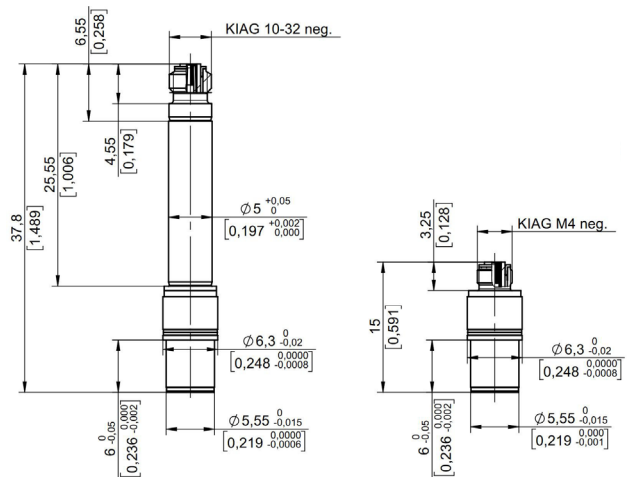

### Technical Data – PE Sensors <sup>1)</sup>

#### Type 603CA...

Output signal	pC	Charge (PE)
Pressure range	bar psi	0 ... 1 000 0 ... 15 000
Calibrated partial range	%	1; 10; 100
Overload	bar psi	1 100 15 950
Sensitivity	(nom.) pC/bar pC/psi	-5.0 -0.35
Linearity	(typ.) %FSO (max.)	≤±0.4 ≤±1.0
Operating temperature range	°C °F	-196 ... +200 -321 ... +392
Rise time (10 ... 90 %)	µs	<0.4
Natural frequency <sup>2)</sup>	kHz	>500
Temp. coefficient of sensitivity		
25 °C ... 200 °C	%/°C	≈-0.027
77 °F ... 392 °F	%/°F	≈-0.015
25 °C ... -196 °C	%/°C	≈+0.027
77 °F ... -321 °F	%/°F	≈+0.015
Acceleration sensitivity (axial)	bar/g psi/g	≤0.00014 ≤0.00200
Acceleration sensitivity (radial)	bar/g psi/g	≤0.00001 ≤0.00015
Insulation resistance	Ω	≥10 <sup>13</sup>
Weight Type 603CAA / 603CAB	gram	4.8 / 2.2
Housing and diaphragm material	-	17-4 S.S.

<sup>1)</sup> Indications are valid for 23 °C / 73 °F (if not specified otherwise)

<sup>2)</sup> Calculated from peak time

**Technical Data – IEPE Sensors <sup>1)</sup>**

Type 603CBA...		00014.0	00035.0	00070.0	00350.0	00690.0	01000.0
Output signal	V	Voltage (IEPE)					
Pressure range	bar psi	14 200	35 500	70 1 000	350 5 000	690 10 000	1000 15 000
Maximum pressure	bar psi	1 000 15 000					
Overload	bar psi	1 100 15 950					
Sensitivity (nom.)	mV/bar mV/psi	357 25	143 10	71 5	14 1	7 0.5	5 0.3
Linearity	%FSO	≤±1.0					
Operating temperature range	°C °F	-55 ... +120 -67 ... +248					
Rise time (10 ... 90 %)	µs	<0.4					
Natural frequency <sup>2)</sup>	kHz	>500					
Time constant (nom.)	s	2	3				
Low frequency response	-3 dB -5 %	Hz Hz	0.080 0.242	0.053 0.161			
Temp. coefficient of sensitivity							
25 ... 120 °C	%/°C	≈-0.027					
77 ... 248 °F	%/°F	≈-0.015					
25 ... -55 °C	%/°C	≈+0.027					
77 ... -67 °F	%/°F	≈+0.015					
Acceleration sensitivity (axial)	bar/g psi/g	≤0.00014 ≤0.00200					
Acceleration sensitivity (radial)	bar/g psi/g	≤0.00001 ≤0.00015					
Supply voltage (by IEPE-Coupler)	VDC	22 ... 30					
Supply current (by IEPE-Coupler)	mA	2 ... 20					
Output bias voltage (nom.)	VDC	11					
Output voltage FSO	V	±5					
Weight	gram	4.0					
Housing and diaphragm material	-	17-4 S.S.					

<sup>1)</sup> Indications are valid for 23 °C / 73 °F (if not specified otherwise)

<sup>2)</sup> Calculated from peak time

**Mounting**

Please check the manual for an overview on the different mounting options.

**Accessories (Included)**

- Sensor seal copper (5 pcs)

**Type/Art.-No.**

1131

**Accessories (Optional)**

- Floating clamp nut M10x1
- Floating clamp nut 5/16-24 UNF
- Adapter M10x1
- Adapter 3/8-24 UNF
- Dummy sensor (standard housing)
- Dummy sensor (short housing)

**Type/Art.-No.**

6423B00

6423B11

6503C0A

6503C1A

6487AA

6487AB

Please check the manual for details and further accessories.

**Ordering Key****Output Signal**


Charge (PE)	<b>A</b>
Voltage (IEPE)	<b>B</b>

**Housing**

Standard housing (PE and IEPE)	<b>A</b>
Short housing (only PE)	<b>B</b>

**Pressure range (only IEPE)**

14 bar / 200 psi	<b>00014.0</b>
35 bar / 500 psi	<b>00035.0</b>
70 bar / 1 000 psi	<b>00070.0</b>
350 bar / 5 000 psi	<b>00350.0</b>
690 bar / 10 000 psi	<b>00690.0</b>
1 000 bar / 15 000 psi	<b>01000.0</b>

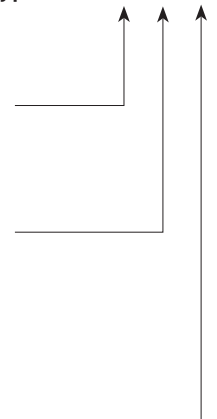Type 603C   **Ordering Example**

PE sensor with standard housing  
 PE sensor with short housing  
 IEPE sensor (70 bar / 1 000 psi)

603CAA  
 603CAB  
 603CBA00070.0